

Planar series Vertical Core pendant P-110




To specify, choose:

Model

☐ P-110

Blade profile

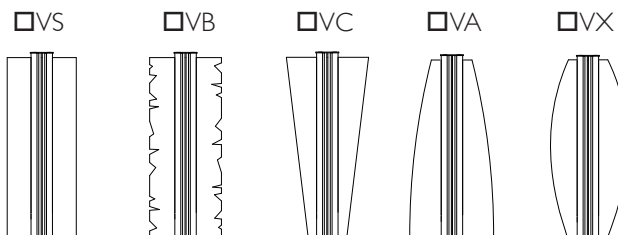

Illumination

20L7C40 = 20 Planar series LED board assemblies,
140 total watts, 14,700 lumens, 4000K CCT, 82 CRI,
L70 50,000 hours, 120-277 volt, 0-10v dimming


- ☐ Optional downlights: 4L10C30 = (4) Terralux
TLM-R16B LED spot modules, 40 total watts, 1712
lumens, 3000K CCT, <80 CRI, L70 60,000 hours, 120v only

Finish

- ☐ ZB - Anodized black with matching powder
coat details
- ☐ ZS - Anodized silver with matching powder
coat details

Dimensions

	W	H	OAH
P-110	11.5-13.75"	32"	78"

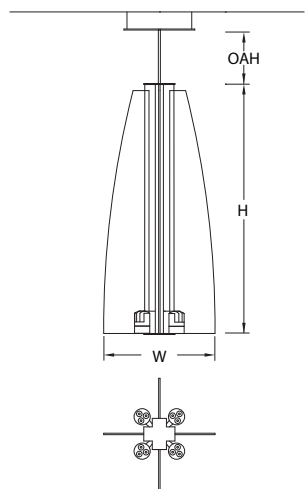

Related products: Crevasse sconce W-110



Specifications

Frame: Custom aluminum extrusions with integral LED board channel, heat sink and acrylic blade supports. Machined aluminum components. Steel stem and mount.

Blades: Four clear 4.5mm acrylic panels with proprietary etched optical pattern to maximize light output and minimize glare.

Mounting: Mounts to a standard octagonal junction box, mounting hardware provided by others.

LED: DigitalSpeck Planar series board assemblies use high performance Seoul Semiconductor STW8Q14B LEDs. Boards can be replaced if needed.

Driver: Constant current drivers for Planar LED boards/downlights located in ceiling canopy.

Rating: UL-Damp location listed. Patents pending.

Warranty: 5 years.

Photometric & BIM: Files available at www.digitalspeck.com.