

## Notes

- OAH is standard unless specified.
- FINISH: Finish is low VOC thermo-cure powdercoat paint or clear lacquer. Specify three digit color suffix with "PT" finish options.
- HOUSING: Consists of a simple large spun aluminum bowl housing and choice of stem kit.
- MOUNTING: Fixture supplied with a painted canopy, 45-degree swivel ball and hanger for mounting to standard octagon junction box.  
DP-928: Fixture supplied with a painted canopy, 60-degree swivel ball and hanger. Structural support is required for this heavy fixture. 2 x 4 blocking or 1/2" IP stud extending 1/2" below finished ceiling through center of octagonal junction box is required.
- ETL listed to UL standards for dry and damp locations
- \*Surge protection recommended for use with D1 (Triac/Leading Edge) dimming systems.

### 1 Fixture Number

<b>DP-920</b>	5"H x 24" Dia. 31" Oah.
<b>DP-922</b>	6"H x 30" Dia. 44" Oah.
<b>DP-924</b>	7"H x 36" Dia. 45" Oah.
<b>DP-926</b>	8"H x 42" Dia. 58" Oah.
<b>DP-928</b>	9"H x 60" Dia. 71" Oah.

### 2 Finish

- Brushed Solid Aluminum (BA)
- Standard Painted Finishes (PT)

### 3 Lamping

LED options includes integral 120-277v 1-100% dimming driver compatible with 0-10v, Triac, and ELV controls. Over-current and short-circuit protected. All LEDs are 80+ CRI, 50,000 hr. L70. Wattage listed includes driver efficiency.

#### DP-920

LED Options	Lumens	Wattage
U32 Uplight	2545 (delivered)	32

#### DP-922

LED Options	Lumens	Wattage
U64 Uplight	5090 (delivered)	64

#### DP-924

LED Options	Lumens	Wattage
U96 Uplight	7635 (delivered)	96

#### DP-926

LED Options	Lumens	Wattage
B129 Uplight + Downlight	5091 up/3710 down (delivered)	129

#### DP-928

LED Options	Lumens	Wattage
B160		

### 4 LED Color Temp

- 27: 2700K
- 30: 3000K
- 35: 3500K
- 40: 4000K


### 5 LED Dimming

- D0: 0-10v
- D1: Triac (Leading Edge)\*
- D2: ELV (Trailing Edge)

### 6 Voltage Options

- 120: 120 volt
- 277: 277 volt (Not available with incandescent lamp options)

### 7 Stem Options

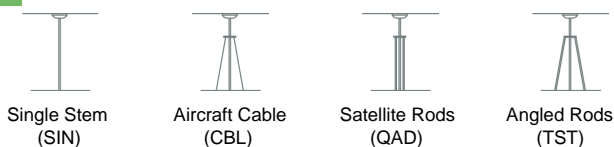

1	2	3	4	5	6	7
Fixture #	Finish (Finish)	Lamping	Color Temp	Dimming	Voltage	Stem